

SCREW 2:STEEL,M3/Zn PLATED,TORQUE:0.5N.m

TECHNICAL DATA

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	30	-	10
WIRE RANGE SOLID/STRANDED (AWG)	28-12		
WITHSTANDING VOLTAGE	1600V (1MIN)		

OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	400	630	1000
RATED CURRENT (A)	20	20	20
IMPULSE WITHSTANDING VOLTAGE (KV)	6.0	6.0	6.0
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm ²)	0.5-4.0		

5 T P 7 6 2 N - 3 E K E X X X L X - 0 1




762
PITCH:7.62mm

SERIES No. _____

POLES
(02-24)

E:GREEN

A:TRAY
B:BAG

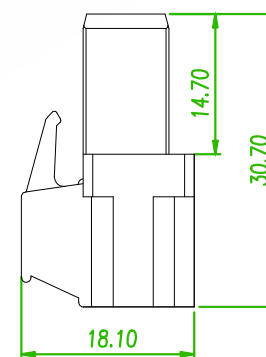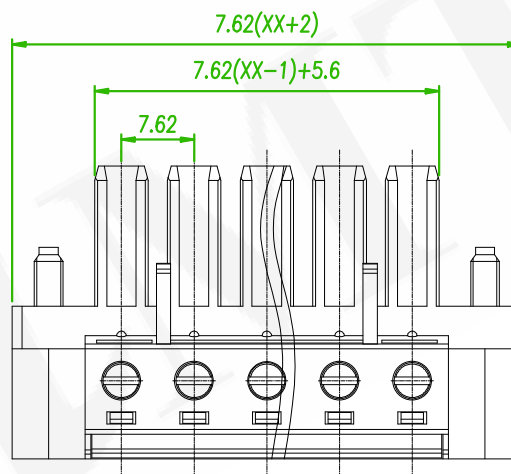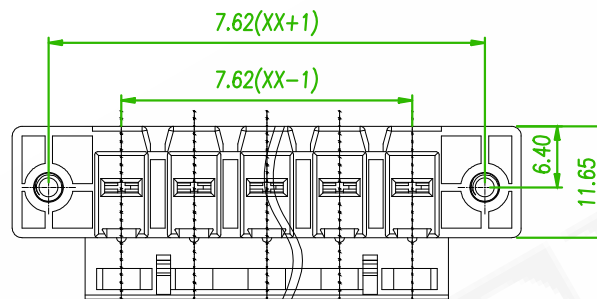

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO.240348 Revise the drawing	Gaby	2024/11/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 7.62mm				頁數 Page	1/1
品號 PART NO.	5TP762N-3EKEXXXLX-01			繪圖 DRAWN	NICK 2019/11/05	
圖號 DRAWING NO.	GN011-NI491	版本 REV.	B	核對 CHECKED	JOSH 2019/11/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2019/11/05	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		