

Withstanding Voltage: AC 1600V for one minute
Wire Range Solid/Standed: 24-8 AWG
Operating temperatur: -40°C to +105°C

MECHANICAL



Housing: PA66, UL94V-0
 Contactor: Copper Alloy, Tin plated

5 T P 7 6 2 R -




3 E D N X X

EL

B - 01

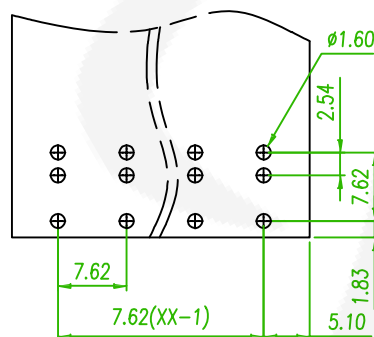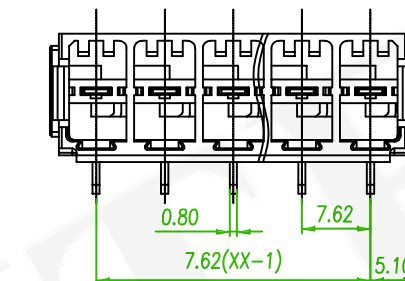

PCB LAYOUT

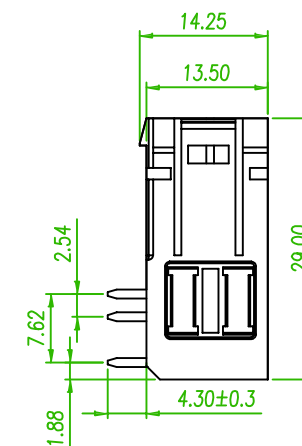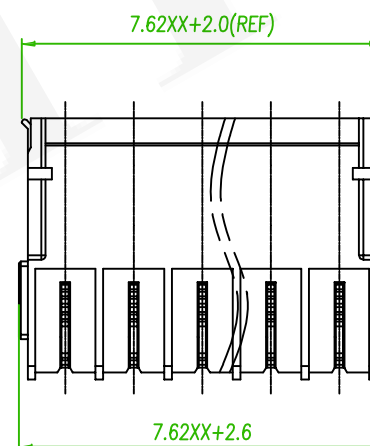

AMTEK 糧德
2020.04.08
Released DCC

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP762R-3EDNXXELB-01			繪圖 DRAWN	David 2020/04/08	
圖號 DRAWING NO.	GN011-DV964	版本 REV.	A	核對 CHECKED	Josh 2020/04/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/04/08	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		