

MATERIAL
HOUSING: NYLON66, UL94V-0
COVER 1: NYLON66, UL94V-0
COVER 2: NYLON66, UL94V-0
PIN: COPPER ALLOY, Sn PLATED
NUT: COPPER ALLOY, M3

MECHANICAL
OPERATING TEMPERATURE: -40°C ~ +105°C
SOLDERING TEMPERATURE: 260°C/5S

TECHNICAL DATA





UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	300	300
RATED CURRENT (A)	30	30	10
WIRE RANGE			
SOLID/STRANDED (AWG)	-		
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC61984			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	400	630	1000
RATED CURRENT (A)	20	20	20
IMPULSE WITHSTANDING VOLTAGE (KV)	6.0	6.0	6.0
CONDUCTOR CROSS SECTION	-		
SOLID/FLEXIBLE (mm ²)			

ORDER INFORMATION

5	T	P	7	6	2	R	-	3	E	M	N	X	X	X	L	X	-	0	1
762 PITCH:7.62mm						SERIES No.			NO. OF POLES (02~24P)		E:GREEN		B:BAG A:TRAY						

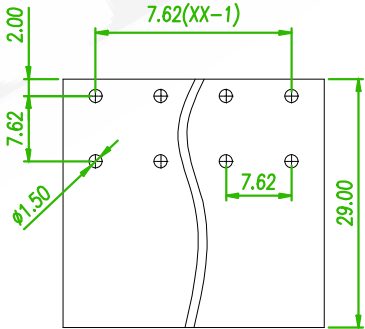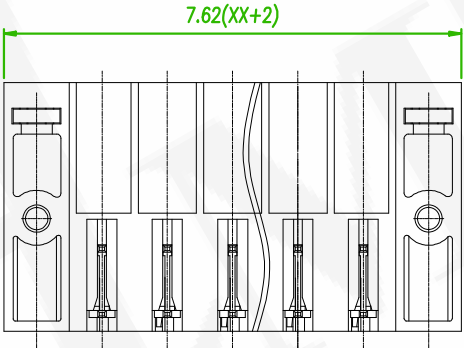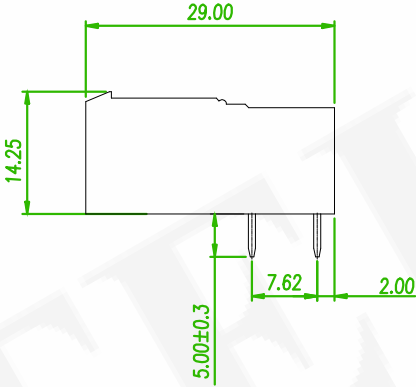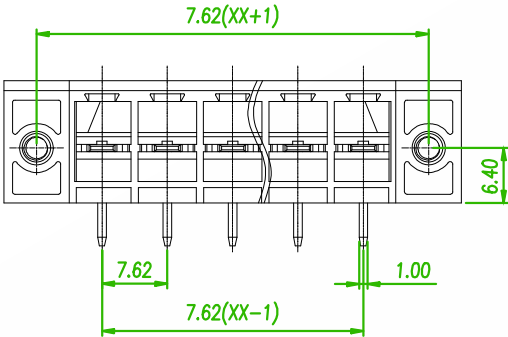

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)



linear dimension (Tolerances Standard GB/T 14486-2008)								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO: 240348 Revise the drawing							Gaby	2024/11/18	
	ECN NO: 200718 Revise the Tolerance							Alice	2020/12/24	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PLUGGABLE 7.62mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5TP762R-3EMEXXXLX-01				繪圖 DRAWN	ERIC 2018/12/11
圖號 DRAWING NO.	GN011-EA239	版本 REV.	C	核對 CHECKED	JOSH 2018/12/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/11	
公差 TOLERANCE		單位 UNIT	mm	第三 ANGLE PROJECTION		