
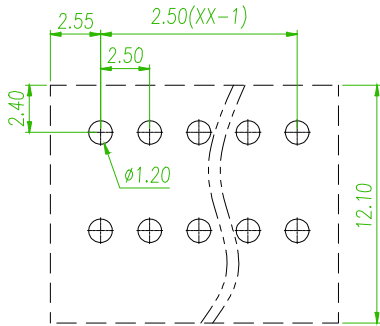
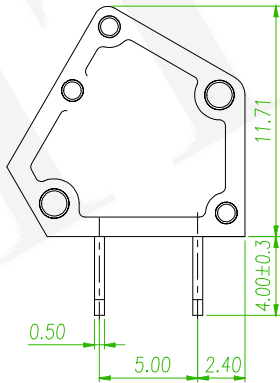
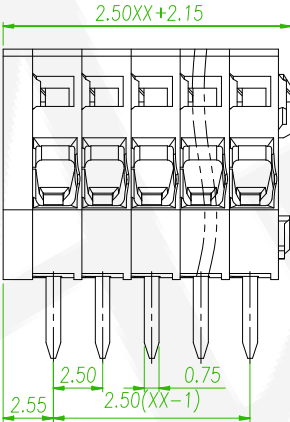
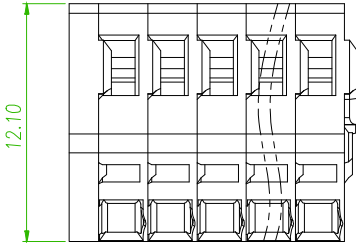


MATERIAL
HOUSING:NYION 66, UL94V-0
CONTACTOR:COPPER ALLOY,TIN PLATED
SPECIFICATION
OPERATING TEMPERATURE: -40°C~105°C
STRIPPING LENGTH:5-6mm

TECHNICAL DATA			
UL/CUL		UL1059	
USE GROUP	B	C	D
RATED VOLTAGE (V)	150	-	-
RATED CURRENT (A)	4	-	-
WIRE RANGE	28-20		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1300V (1MIN)		

IEC			
IEC60947-7-4			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	63	160	320
RATED CURRENT (A)	6	6	6
IMPULSE WITHSTANDING VOLTAGE (KV)	2.5	2.5	2.5
CONDUCTOR CROSS SECTION	0.2-0.5		
SOLID/FLEXIBLE (mm²)			

ORDER INFORMATION

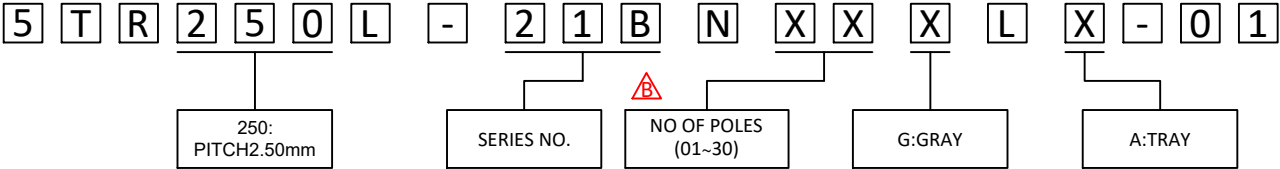

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO.240824 Revise the drawing	Benson	2024/10/14
△	EasyFlow No.:202401240001	Randy	2024/03/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK PCB SPRING 2.50mm DIP ANGLED TYPE				頁數 Page	1/1
	品號 PART NO.	5TR250L-21BNXXXLX-01				繪圖 DRAWN	Randy 2024/03/07
	圖號 DRAWING NO.	GN011-RD349	版本 REV.	B	核對 CHECKED	Josh 2024/03/07	
	客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Josh 2024/03/07	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		