

MATERIAL
HOUSING: NYLON66, UL94V-0
PIN: COPPER ALLOY, Sn PLATED

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
STRIPPING LENGTH: 5~6mm
TECHNICAL DATA

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	10	-	10
WIRE RANGE	28-12		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC	EC0007-7-4		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	400	630	1000
RATED CURRENT (A)	21	21	21
IMPULSE WITHSTANDING VOLTAGE (KV)	6.0	6.0	6.0
CONDUCTOR CROSS SECTION	0.2-2.5		
SOLID/FLEXIBLE (mm ²)			

ORDER INFORMATION

5 T R 7 5 0 L - 4 T 2 N X X X L X - 0 1





750
PITCH: 7.50mm

SERIES No.

NO OF POLES TOTAL
(04~32P)

G: GRAY

A: TRAY
B: BAG

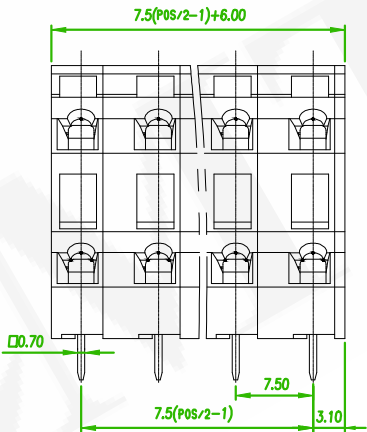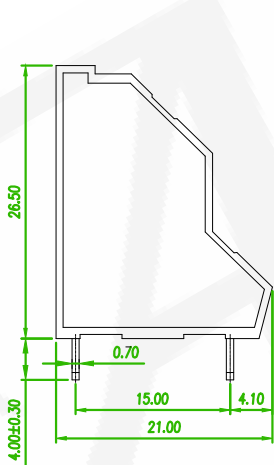

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)



linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO: 240348	Revise the drawing	Gaby	2024/11/21
△	ECN NO: 230714	Revise the PART NO.	Randy	2023/09/23
△x1	ECN NO: 220814	Revise the PART NO.	Tim	2022/09/16
REV.	ECN NO. OR DESCRIPTION		REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PCB SPRING 7.50mm DIP ANGLED TYPE				頁數 Page	1/1
品號 PART NO.	5TR750L-4T2NXXXLX-01			繪圖 DRAWN	ERIC 2018/12/26	
圖號 DRAWING NO.	GN011-EA388	版本 REV.	F	核對 CHECKED	JOSH 2018/12/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2018/12/26	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		