

MATERIAL
HOUSING: NYLON66, UL94V-0
PIN: COPPER ALLOY, Sn PLATED

MECHANICAL
OPERATING TEMPERATURE: -40°C~+105°C
STRIPPING LENGTH: 5~6mm




TECHNICAL DATA

UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	28-12		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		
IEC	IEC60047-7-4		
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	400	630	1000
RATED CURRENT (A)	24	24	24
IMPULSE WITHSTANDING VOLTAGE (KV)	6.0	6.0	6.0
CONDUCTOR CROSS SECTION SOLID/FLEXIBLE (mm²)	0.2-2.5		

ORDER INFORMATION

5	T	R	7	6	2	L	-	2	4	5	N	X	X	X	L	X	-	0	1
762: PITCH 7.62mm							SERIES No.			NO OF PINS TOTAL (02-30P)			G: GRAY			A: TRAY W/O CAP			

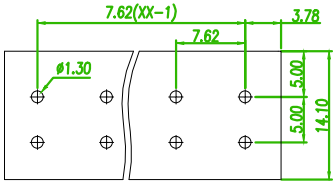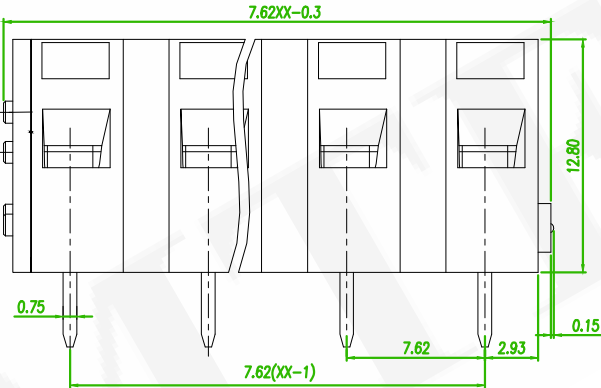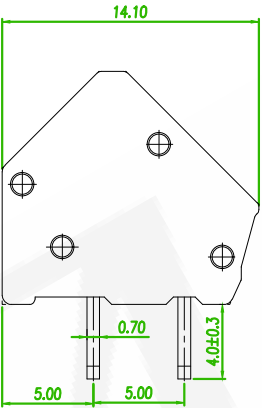

RECOMMENDED PCB LAOUT
(PCB TOLERANCE ±0.05)



linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:240348 Revise the drawing	Gaby	2024/11/21
△	ECN NO:230714 Revise the PART NO.	Randy	2023/09/23
△x2	ECN NO:201126 Revise the PART NO.	Alice	2020/12/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK PCB SPRING 7.62mm DIP ANGLED TYPE				頁數 Page	1/1
品號 PART NO.	5TR762L-245NXXXLX-01			繪圖 DRAWN	MIA 2016/07/06	
圖號 DRAWING NO.	GN011-AL448	版本 REV.	E	核對 CHECKED	SABRINA 2016/07/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	BORIS 2016/07/06	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		