


MATERIAL \triangle
 HOUSING: NYLON66, UL94V-0
 PIN: COPPER ALLOY, Sn PLATED

ORDER INFORMATION

AMTEK 懌德
 2025.02.20
 Released DCC

MECHANICAL
 OPERATING TEMPERATURE: -40°C~+105°C
 SOLDERING TEMPERATURE: 260°C/5S
 STRIPPING LENGTH: 6~7mm




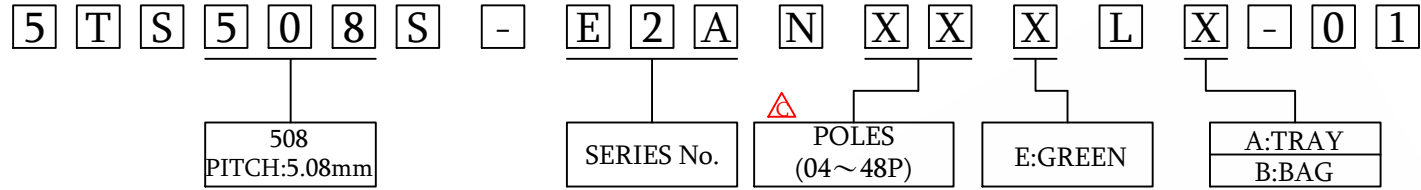


TECHNICAL DATA \triangle
 UL/CUL

SAFETY APPROVAL			
USE GROUP	B	C	D
RATED VOLTAGE (V)	300	-	300
RATED CURRENT (A)	15	-	10
WIRE RANGE	30-14		
SOLID/STRANDED (AWG)			
WITHSTANDING VOLTAGE	1600V (1MIN)		

IEC

SAFETY APPROVAL			
OVERVOLTAGE CATEGORY	III	III	II
CONTAMINATION CLASS	3	2	2
RATED VOLTAGE (V)	250	400	630
RATED CURRENT (A)	24	24	24
IMPULSE WITHSTANDING VOLTAGE (KV)	4.0	4.0	4.0
CONDUCTOR CROSS SECTION	0.5-2.5		
SOLID/FLEXIBLE (mm ²)			

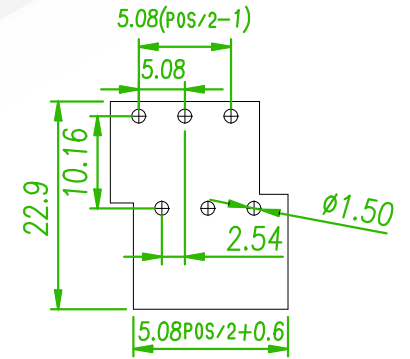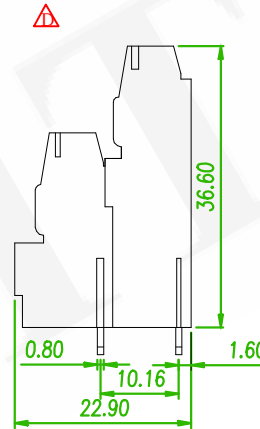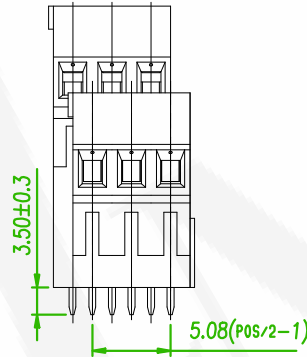

RECOMMENDED PCB LAOUT
 (PCB TOLERANCE ±0.05)

linear dimension(Tolerances Standard GB/T 14486-2008)								—	\square	\perp
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

\triangle	ECN NO:240348 Revise the drawing	Gaby	2024/08/09
$\triangle \times 1$	ECN NO:220814 Revise the PART NO.	Tim	2022/09/16
$\triangle \times 1$	ECN NO:200718 Revise the Tolerance	David	2024/05/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懌德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	\triangle TERMINAL BLOCK PCB SCREW 5.08mm DIP V/T TYPE			頁數 Page	1/1
品號 PART NO.	\triangle 5TS508S-E2ANXXLX-01		繪圖 DRAWN	Eric 2018/12/13	
圖號 DRAWING NO.	GN011-EA278	版本 REV.	D	核對 CHECKED	Josh 2018/12/13
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/13
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	