

ORDER INFORMATION

5 M H 1 S 3 0 N - 2 X X X X X X U - 1196 - 0 1




SPECIFICATIONS

CURRENT RATING: 3 AMP
INSULATION RESISTANCE: $\geq 5000M\Omega$ AT V=500V
CONTACT RESISTANCE: $\leq 10m\Omega$
DIELECTRIC VOLTAGE: 1000V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -55°C TO +125°C



MATERIAL

INSULATOR: PPS, UL94V-0
CONTACT PIN: BRASS

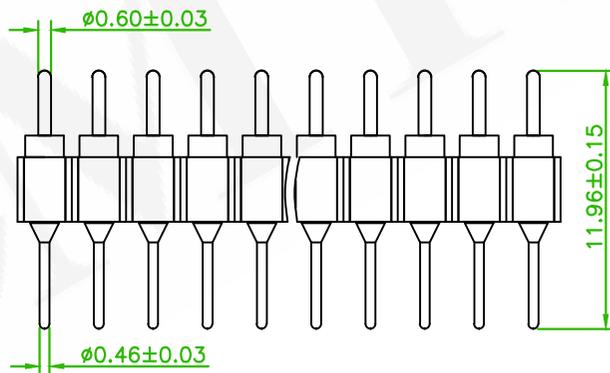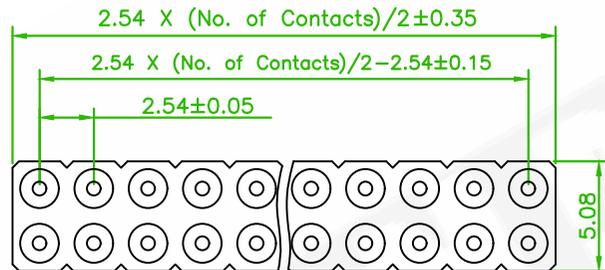

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

 懌德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 2.54mm DIP V/T TYPE			頁數 Page	1/1
	品號 PART NO.	5MH1S30N-2XXXXXXU-1196-01(CN005)			繪圖 DRAWN	Willy 2026/03/05
	圖號 DRAWING NO.	GN005-WW591	版本 REV.	A	核對 CHECKED	Josh 2026/03/05
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2026/03/05
	公差 TOLERANCE	.X \pm 0.25 .XX \pm 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN 202601067 ECN NO. OR DESCRIPTION	Willy REVISED	2026/03/05 DATE
------	---	------------------	--------------------