

ORDER INFORMATION




SPECIFICATIONS

CURRENT RATING: 0.5A AC,DC
VOLTAGE RATING: 30V AC,DC
TEMPERATURE RANGE: -40°C ~ +105°C 
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN
WITHSTANDING VOLTAGE: 200V AC/MINUTE



MATERIAL

CONTACT: PHOSPHOR BRONZE
MATERIAL: NYLON 46,UL94V-0
APPLICABLE WIRE :AWG#32
INSULATION O.D: 0.38mm

5	W	0	8	0	0	D	X	-	1	X	X	X	X	X	X	U	A	0	1
PITCH 0.80mm			0:W/O EAR 1:WITH EAR		1:SINGLE ROW		NO. OF CONTACTS PER ROW		T0:TIN PLATED G0:GOLD FLASH		W:NATURAL		X:BOX		RoHS				

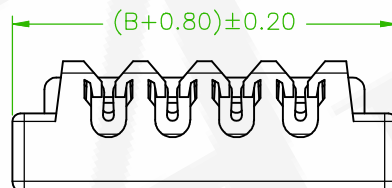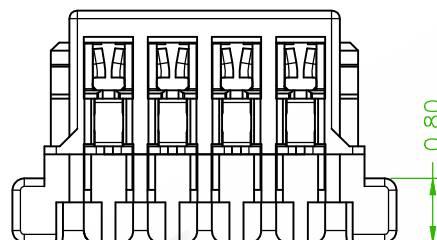
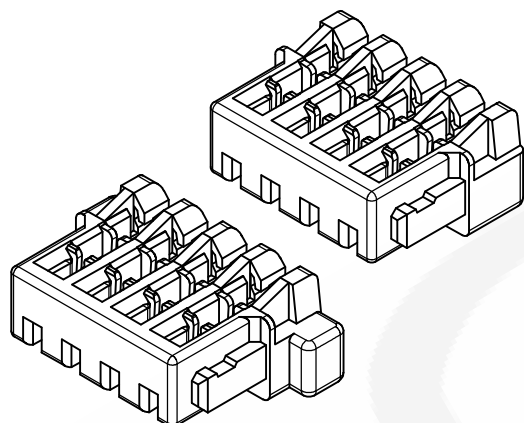


1:With Ear

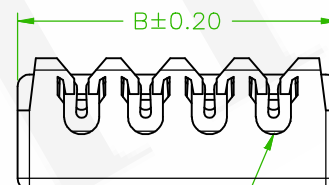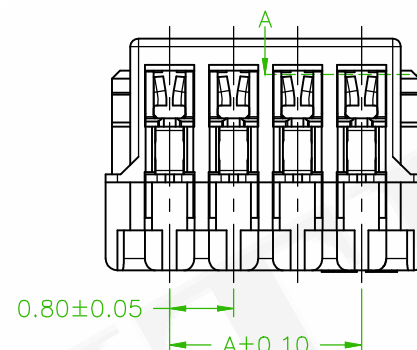

Circuit 1

0:W/O Ear

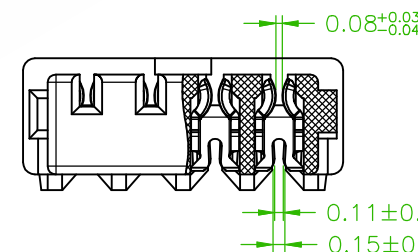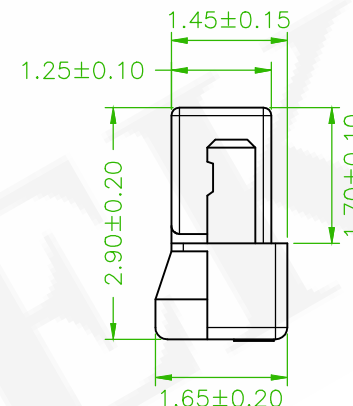

SECTION A-A

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	0.80	2.40	10P	7.20	8.80
03P	1.60	3.20	11P	8.00	9.60
04P	2.40	4.00	12P	8.80	10.40
05P	3.20	4.80	14P	10.40	12.00
06P	4.00	5.60	15P	11.20	12.80
07P	4.80	6.40	16P	12.00	13.60
08P	5.60	7.20	17P	12.80	14.40
09P	6.40	8.00	20P	15.20	16.80

OLD PART NO.:0800IDC-XXTW-U

REV.	ECN-202507062 Revise the drawing	Gaby	2025/08/13
	ECN NO. OR DESCRIPTION	REVISED	DATE

 懋德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	WAFER 0.80mm IDC TYPE				頁數 Page	1/1
	品號 PART NO.	5W0800DX-1XXXXXXUA01				繪圖 DRAWN	Eloise 2016/11/28
	圖號 DRAWING NO.	GW090-JF050	版本 REV.	B	核對 CHECKED	JOSH 2016/11/28	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2016/11/28	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		