

SPECIFICATIONS

CURRENT RATING: 1A AC,DC
VOLTAGE RATING: 125V AC,DC
TEMPERATURE RANGE: -40°C TO +105°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN
WITHSTANDING VOLTAGE: 500V AC/MINUTE
MATERIAL:NYLON 6T,UL94V-0
PIN MATERIAL: PHOSPHOR BRONZE

ORDER INFORMATION

5

W

1

2

5

0

R

0

-

1

X

X

X

X

X

X

U

A

0

1

PITCH 1.25mm

1:SINGLE ROW

NO. OF CONTACTS PER ROW











T0:TIN PLATED
G0:GOLD PLATED

W:NATURAL

X:BOX

RoHS

Circuit No.	Dimensions				
	A	B	C	D	E
02P	---	4.25	3.05	3.65	---
03P	2.50	5.50	4.30	4.90	---
04P	3.75	6.75	5.55	6.15	2.50
05P	5.00	8.00	6.80	7.40	3.75
06P	6.25	9.25	8.05	8.65	5.00
07P	7.50	10.50	9.30	9.90	6.25
08P	8.75	11.75	10.55	11.15	7.50
09P	10.00	13.00	11.80	12.40	8.75
10P	11.25	14.25	13.05	13.65	10.00
11P	12.50	15.50	14.30	14.90	11.25
12P	13.75	16.75	15.55	16.15	12.50
13P	15.00	18.00	16.80	17.40	13.75
14P	16.25	19.25	18.05	18.65	15.00
15P	17.50	20.50	19.30	19.90	16.25
16P	18.75	21.75	20.55	21.15	17.50
17P	20.00	23.00	21.80	22.40	18.75
18P	21.25	24.25	23.05	23.65	20.00

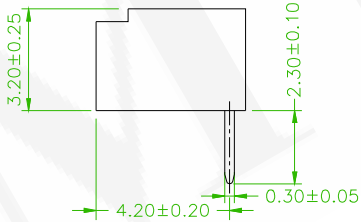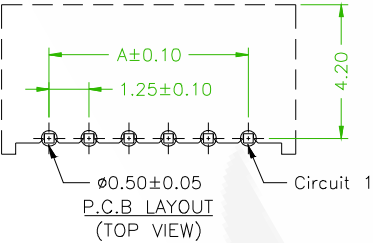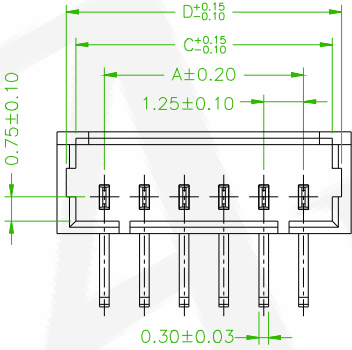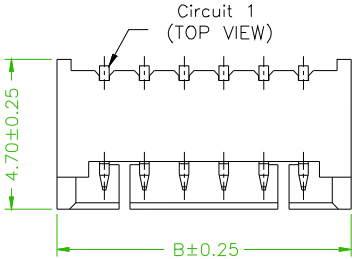

Old Part No.:1250R-XXW-U

△	ECN-202510011	Alice	2025/10/27
△x1	Add the Package option	Benson	2020/11/24
△x1	Revised the Drawing	Jeff	2016/10/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	WAFER 1.25mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5W1250R0-1XXXXXXUA01				繪圖 DRAWN	Mia 2015/09/04
圖號 DRAWING NO.	GW090-BN373	版本 REV.	D	核對 CHECKED	John 2015/09/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04	
公差 TOLERANCE	△.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		